




Coordination Modular EcoFlex

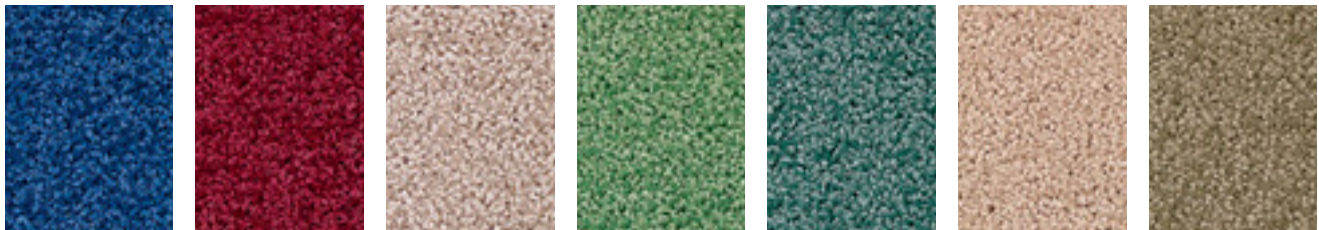

8545 Actual

8383 Applicable

8718 Arrange

8655 Attach

8646 Border

8738 Combine

8658 Common

COLORWAY CONTINUED ON NEXT PAGE



8238 Complete

8828 Concur

8936 Connect

8585 Correlate

8899 Definite

8556 Equate

8878 Exact

PRODUCT SPECIFICATIONS

Style Name.....	Coordination Modular EcoFlex
Product Type.....	Modular
Construction	Tufted
Surface Appearance	Level Solid Cut and Loop
Nylon Type.....	Colorstrand® SD Nylon
Gauge	1/10 (39.37 rows per 10 cm)
Pile Weight.....	26.0 oz. per sq. yd. (882 g/m ²)
Pile Thickness.....	.108" (2.74 mm)
Stitches Per Inch	11.0 (38.58 per 10 cm)
Dye Method.....	Solution Dyed
Protective Treatment.....	Sentry Plus
Density	8,667
Weight Density.....	225,342
Primary Backing.....	Non Woven Synthetic
Backing Foundation	Not Applicable

Secondary Backing	EcoFlex Modular System
Pattern Repeat.....	Not Applicable
Size.....	24" X 24" (.6096 m X .6096 m)
Flammability	ASTM E 648 Class 1 (Glue Down)
Smoke Density	ASTM E 662 Less Than 450
Static Propensity.....	AATCC-134 Under 3.5 KV
IAQ Green Label	44622771
IAQ Green Label Plus.....	2771
CRI Rating.....	Heavy Traffic
Warranties: Lifetime Limited Modular Warranty, Lifetime Limited Colorfastness To Light, 10 Year Limited Colorfastness To Atmospheric Contaminants, 10 Year Stain Warranty, Lifetime Static	

Coordination UltraSet/EcoFlex Modular



8868 Fasten



8821 Fit




8628 Fusing



8656 Goes With



8985 Harmonize



8611 In Cahoots




8566 Inset



8252 Linking



8822 Match Up



8989 Mingle



8898 Mix



8696 Organize



8262 Pair



8695 Pertinent



8978 Pool



8555 Relate



8343 Relevant



8333 Same As



8979 Share




8121 Side by Side



8388 Suitable



8536 Sure Fit




8519 Take Part



8253 This One



8939 Unite



8484 Usable